



Design

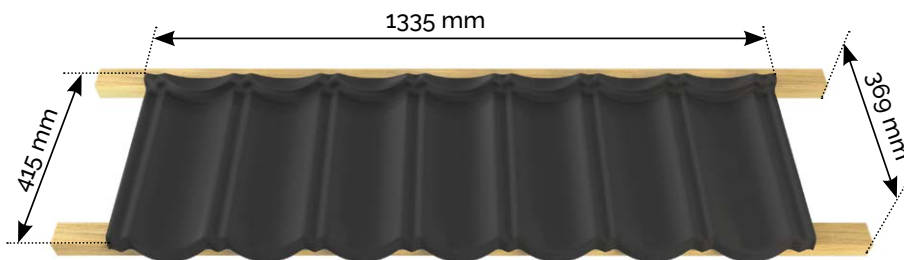

Overall Length*	1335 mm
Length of Cover*	1260 mm
Overall Width*	415 mm
Width of Cover/ Batten space	369 mm
Minimum pitch	12° (21%)
Maximum pitch	90°
Roof Cover*	0.465 m ²
Tiles per m ²	2.15
Weight/panel	2.97 kg
Weight/area	6.39 kg/m ²

Material structure

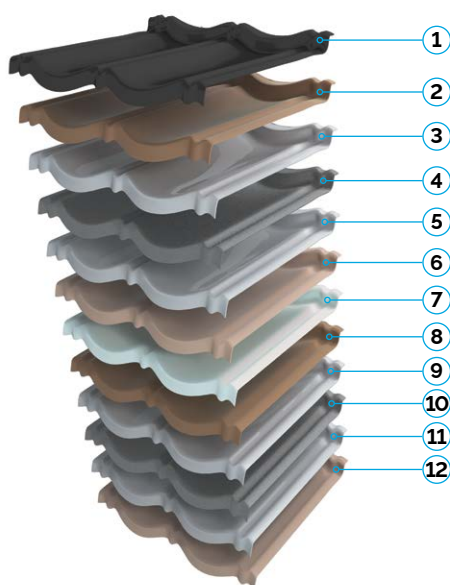


- 1 Super durable powder coating (> 80 µm)
- 2 Polyurethane primer
- 3 Aluminium-Zinc / Zinc-Magnesium
- 4 Steel
- 5 Aluminium-Zinc / Zinc-Magnesium
- 6 Polyester primer / backcoating
- 7 Acrylic tape
- 8 AFP (antifingerprint) layer
- 9 Aluminium-Zinc
- 10 Steel
- 11 Aluminium-Zinc
- 12 AFP (antifingerprint) layer

Coating specification

Polyester Powder Coating: The finish coating is an extremely durable High Gloss Polyester Powder Coating that is applied post pressing. This coating has proven durability retaining its high gloss finish for many years in all environments.

Transparent coatings: Both sides of the galvanized alloy coated steel are coated with a transparent layer that provides protection and a uniform substrate for further coatings. This transparent coating allows identification of the aluminium-zinc substrate to be made by distributors and customers.

Colours

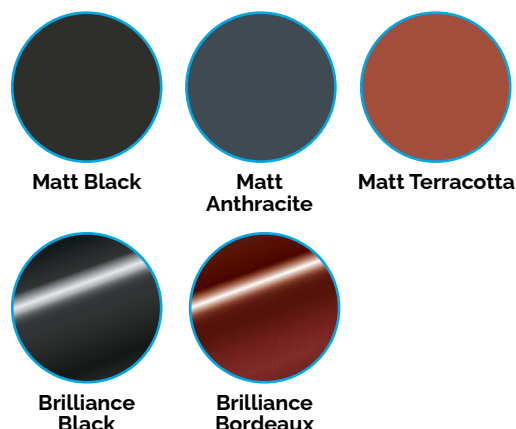

Steel specification

The Decra Elegance ACO tile is made from two steel layers joined with polymer adhesive. The sound-absorbent polymer ensures robust structure, feather light weight, and inaudible rain noise. The roof tile is finished with a Super Durable powder coating to ensure a stylish, scratch-resistant and Ultra UV-resistant surface coating.

Steel Thickness	2x 0.3 mm
Steel Grade	DX51D / DX52D
Aluzinc® Coating Mass	150 g/m ² / 250g/m ²
Aluzinc® Coating Grade	AZ150 / ZM250

Date of issue: September 2025*

* This specification sheet is valid as of the date of issue and may be subject to change without prior notice. It remains valid until superseded by a later version.